



G1691 Emergency Shower, Horizontally Mounted, All-Stainless Steel

APPLICATION: All-stainless steel emergency shower for horizontal mounting. Ideal for use in areas where highly corrosive materials are handled, as well as in laboratory and clean room applications.

SHOWER HEAD: 10" diameter stainless steel.

VALVE: 1" IPS stainless steel stay-open ball valve. Valve has stainless steel ball and Teflon® seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

PIPE AND FITTINGS: 1" IPS stainless steel.

SUPPLY: 1" NPT female inlet.

SIGN: ANSI-compliant identification sign.

Available Options


- PSH** Orange ABS plastic shower head.
- FC20** Regulates shower flow rate to 20 GPM.
- AP280-100 ELECTRIC LIGHT AND ALARM HORN**
Flashing light and horn serve to summon assistance when shower is activated.
- TMV** G3800 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2009. Refer to "Tempering Units" section for complete technical and product selection information.
- AP250-015 MODESTY CURTAIN**
Modesty curtain for horizontal shower installation.



Pull rod rotated 90° for viewing.



□ G1691 Emergency Shower, Horizontally Mounted, All-Stainless Steel

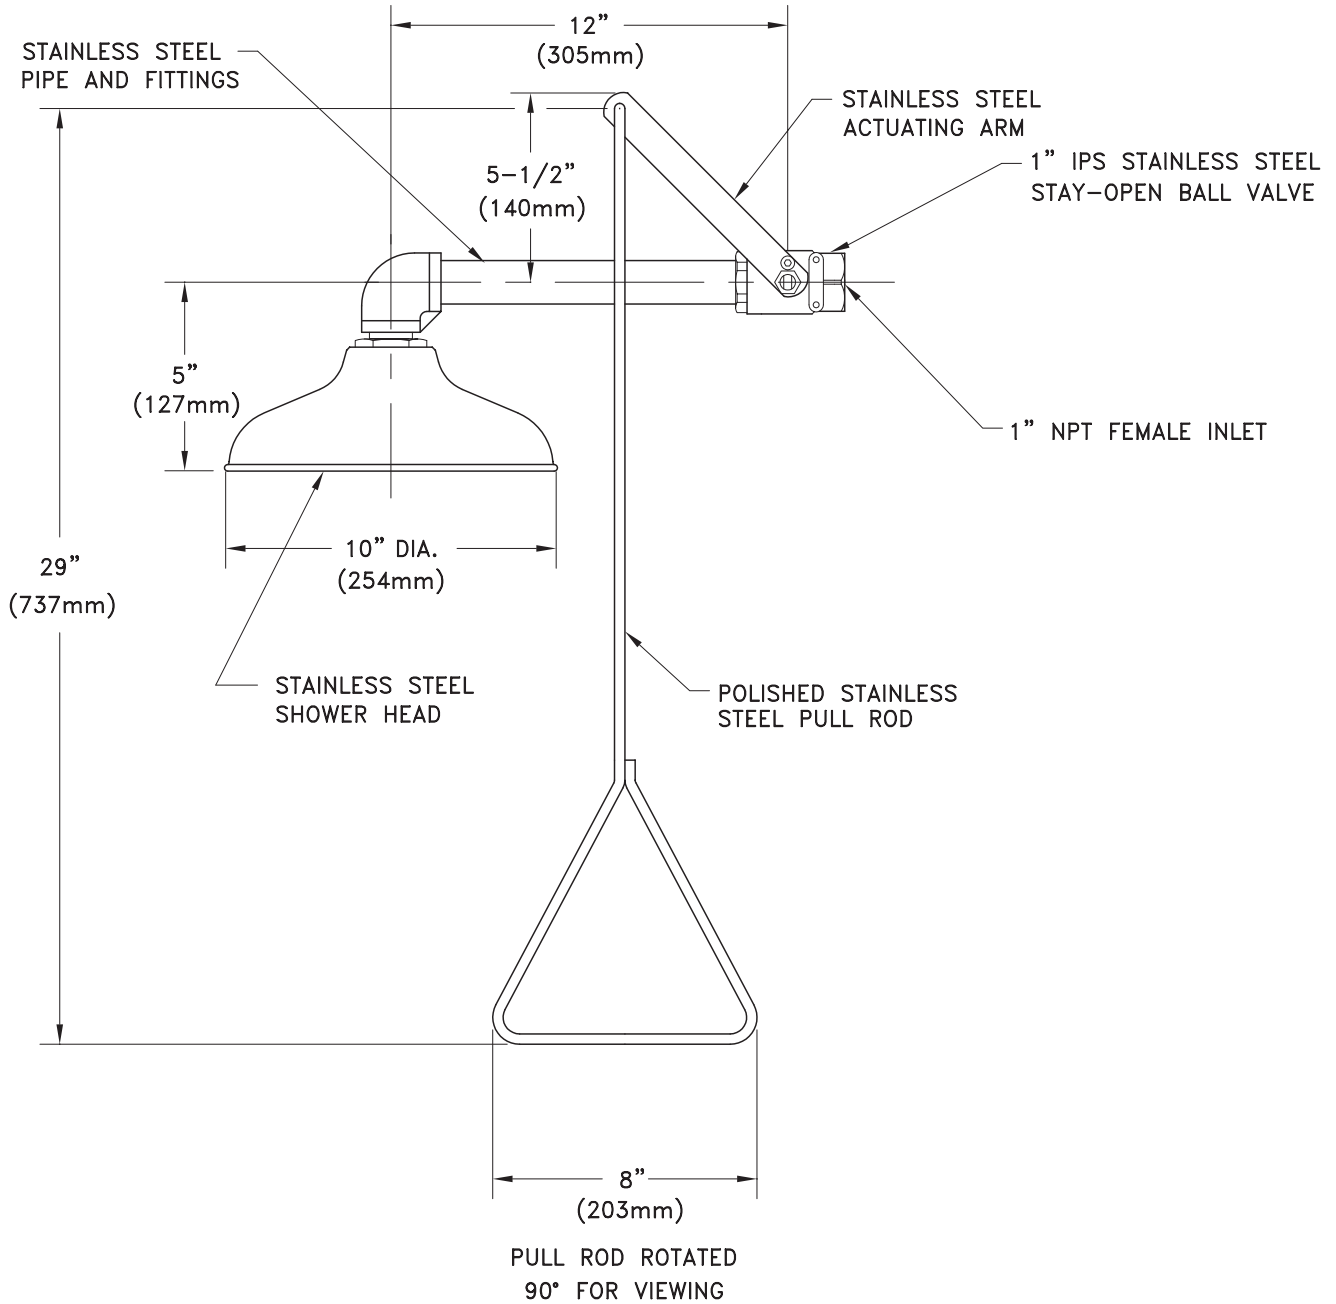

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4"$ (6mm). rev. 0112

Sign Included

