



### □ G1704BC WideArea™ Eye/Face Wash, Pedestal Mounted, Stainless Steel Bowl and Cover

**APPLICATION:** Free standing, pedestal mounted WideArea™ eye/face wash. Unit has stainless steel cover to protect bowl from dust, dirt and other contaminants. Four GS-Plus™ spray-type outlet heads deliver a flood of water over a wide area of coverage for complete rinsing of eyes and face.

**SPRAY HEAD ASSEMBLY:** Four GS-Plus™ spray heads. Each head has an internal flow control and filter to remove impurities from the water flow.

**VALVE:** 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals.

**BOWL:** 11 1/2" stainless steel with bowl cover. Cover is raised automatically when flag handle is activated. Cover closes when handle is returned to closed position.

**PIPE AND FITTINGS:** Schedule 40 galvanized steel. Furnished with orange polyethylene covers on vertical piping for high visibility and corrosion resistance.

**SUPPLY:** 1/2" NPT female inlet.

**WASTE:** 1 1/4" NPT female outlet.

**SIGN:** ANSI-compliant identification sign.

**QUALITY ASSURANCE:** Valve, bowl and spray head assembly is factory assembled and water tested prior to shipment.


#### Available Options

- **HFC** Hand and foot control. Eye/face wash is activated by flag handle or foot treadle.
- **HS** Auxiliary hand-held drench hose for rinsing eyes, face or body.
- **TMV** G3600 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2009. Refer to "Tempering Units" section for complete technical and product selection information.





### □ G1704BC WideArea™ Eye/Face Wash, Pedestal Mounted, Stainless Steel Bowl and Cover

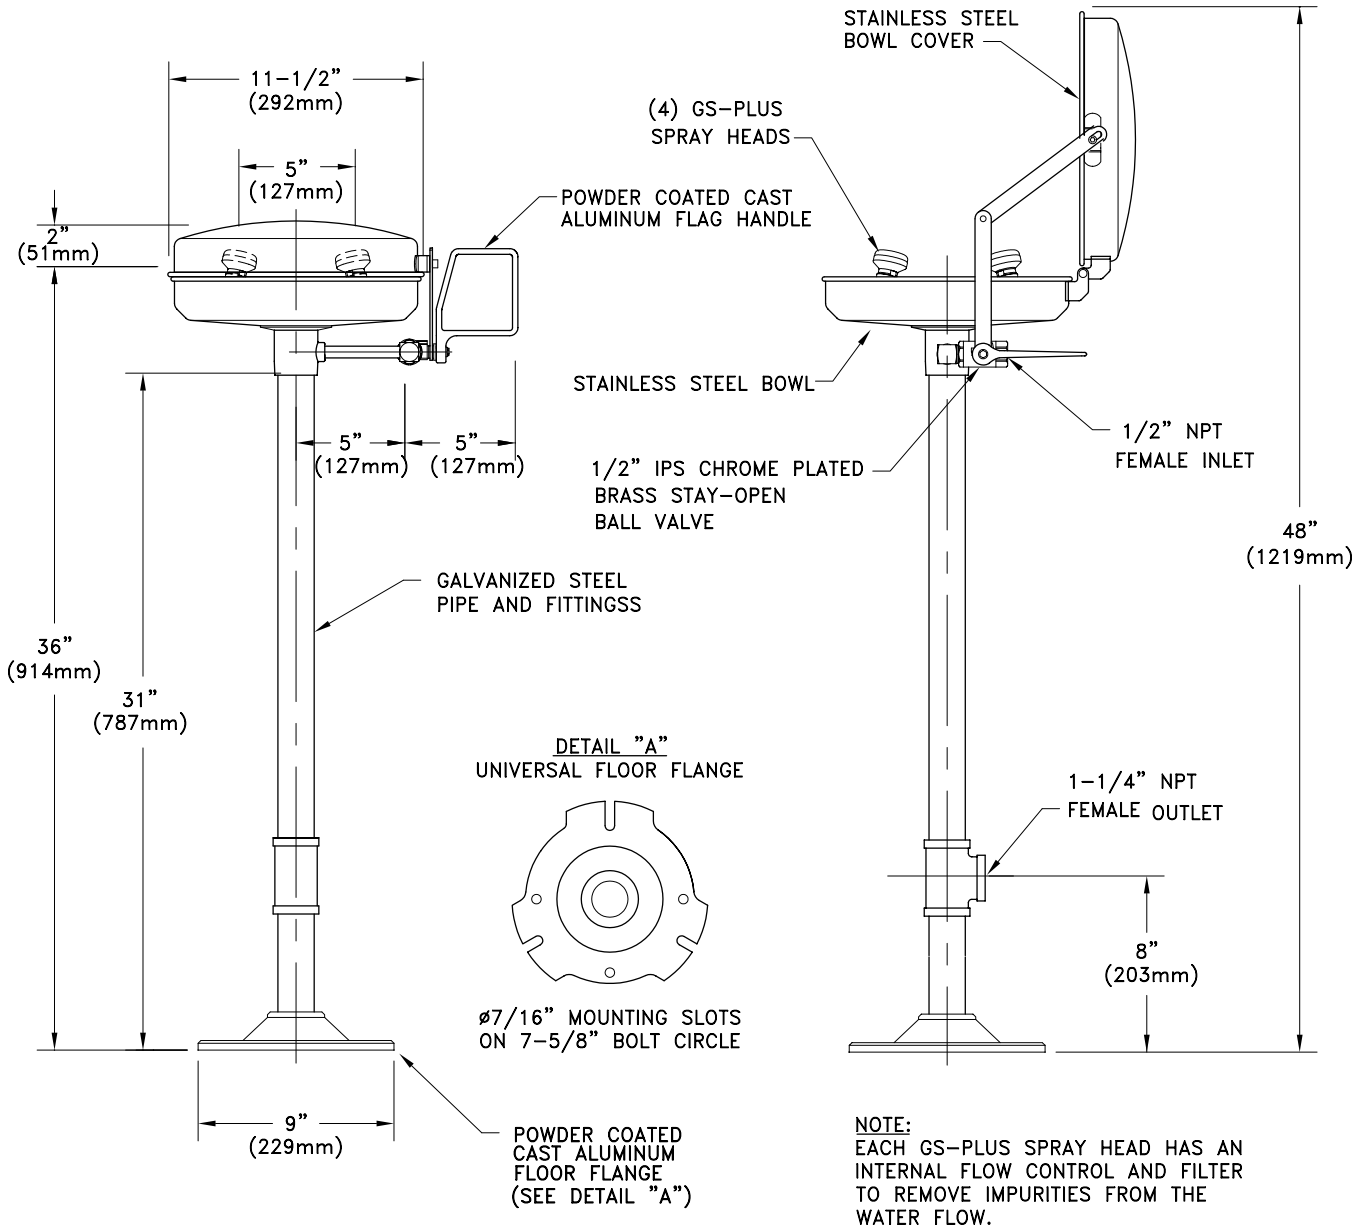

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0112

Sign Included

