

GVR1903 Vandal-Resistant Safety Station with Eyewash

Application: Combination eyewash and shower safety station with vandal-resistant construction. Ideal for use in schools and other areas where equipment may be subject to abuse. All threaded connections are secured with set screws or cement to prevent disassembly.

Shower Head: 10" diameter stainless steel with 20 GPM flow control.

Shower Valve: 1" IPS chrome plated brass valve with stainless steel actuating arm and 29" stainless steel pull rod.

Spray Head Assembly: Each vandal-resistant GS-Plus™ spray head has a stainless steel "flip-top" dust cover, internal flow control and filter to remove impurities from the water flow.

Eyewash Bowl: 11-1/8" stainless steel.

Eyewash Valve: 1/2" IPS chrome plated brass self-closing ball valve with flag handle.

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene covers for vertical piping for high visibility and corrosion resistance.

Supply: 1-1/4" NPT female top or side inlet.

Waste: 1-1/4" NPT female outlet.

Sign: Furnished with ANSI-compliant identification sign.

Quality Assurance: Valve, bowl and spray head assemblies are factory assembled and water tested prior to shipment.

Note: Safety stations with self-closing valves do not comply with the provisions of ANSI Z358.1-2014. However, they may be advantageous where there is a danger of unintended operation of the shower (as in schools) or where large volumes of water might damage surrounding equipment.

Available Options

- G6040 Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Thermostatic Mixing Valves" section for complete technical and product selection information.
- AP275-200 Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when eye/face wash or shower is activated. Furnished complete with flow switch and mounting hardware.
- ☐ AP250-015 Modesty Curtain


Modesty curtain for mounting on safety station.







GVR1903 Vandal-Resistant Safety Station with Eyewash

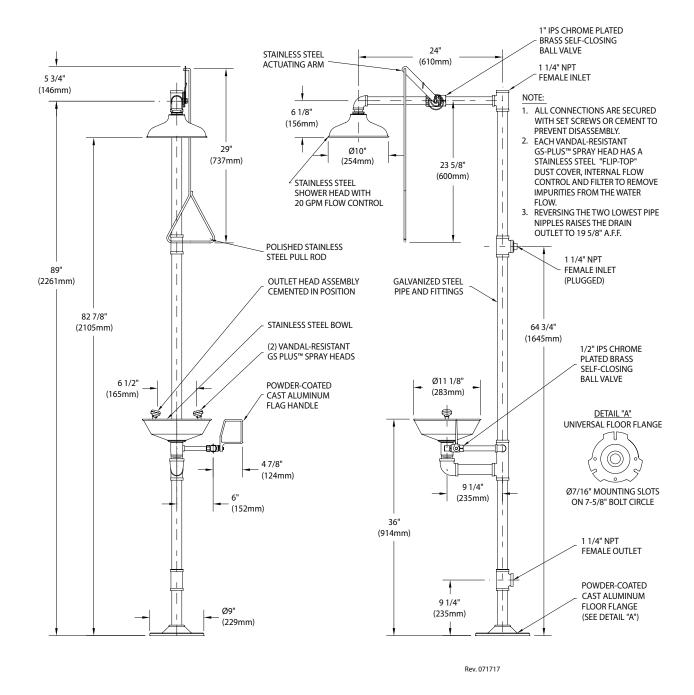

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are \pm 1/4" (6mm).



